

Rechargeable Sealed Lead-Acid Battery

PS-1223

12 Volt 2.3 Amp. Hrs.



Features:


- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS

| | |
|--|---|
| Nominal Voltage | 12 volts (6 cells in series) |
| Nominal Capacity | |
| 20 hour rate (115mA to 10.50 volts) | 2.30 A.H. |
| 10 hour rate (225mA to 10.50 volts) | 2.25 A.H. |
| 5 hour rate (390mA to 10.20 volts) | 1.95 A.H. |
| 1 hour rate (1.38A to 9.00 volts) | 1.38 A.H. |
| 15 min. rate (4.50A to 9.00 volts) | 1.50 A.H. |
| Approximate Weight | 1.68 pounds (0.76 kg) |
| Energy Density (20 hour rate) | 1.71 Watt-hours/cubic inch (103.3 Watt-hours/l) |
| Specific Energy (20 hour rate) | 15.7 Watt-hours/pound (34.5 Watt-hours/kg) |
| Internal Resistance (Fully Charged Battery) | 105 milliohms (approximately) |
| Maximum Discharge Current (≤ 7 Min.) | 6.9 amperes |
| Maximum Short-Duration Discharge Current (≤ 10 Sec.) | 10.0 amperes |
| Terminals | Pressure Contacts |
| Shelf Life — % of nominal capacity at 68° F (20° C) | |
| 1 Month..... | 97% |
| 3 Months..... | 91% |
| 6 Months..... | 83% |
| Operating Temperature Range | |
| Charge | -4°F (-20°C) to 122°F (50°C) |
| Discharge | -4°F (-20°C) to 140°F (60°C) |
| Case | ABS Plastic |


Shelf Life and Storage

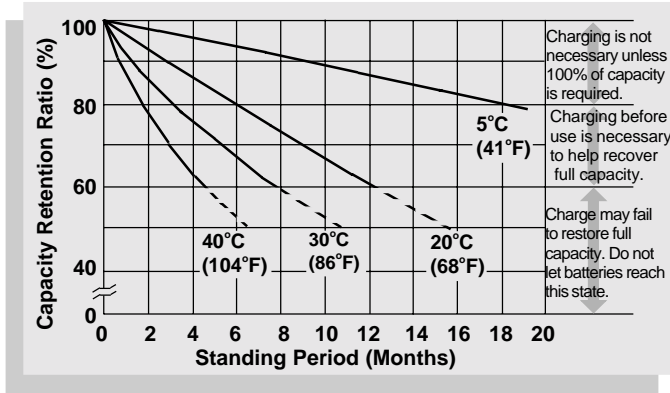


Discharge Characteristics

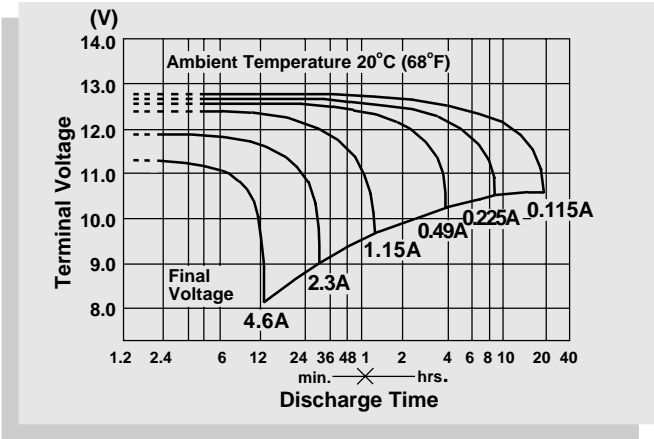


Life Characteristics in Stand-By Use

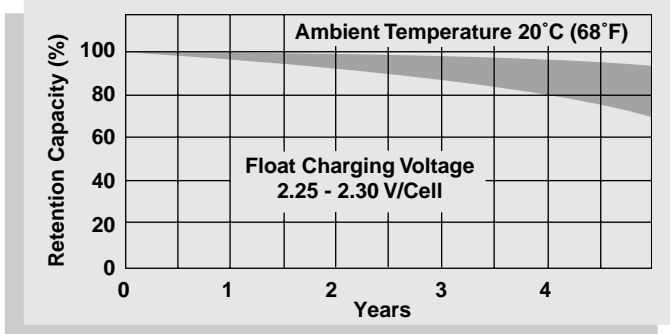

Discharge Time vs. Discharge Current

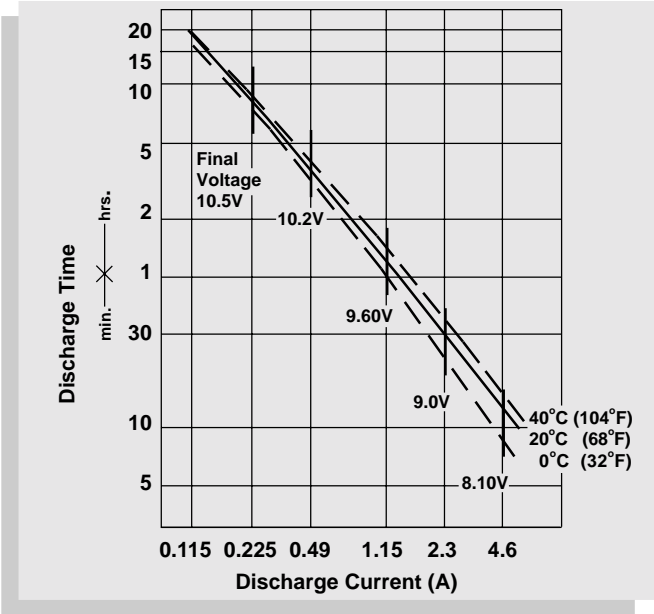


Life Characteristics in Cyclic Use

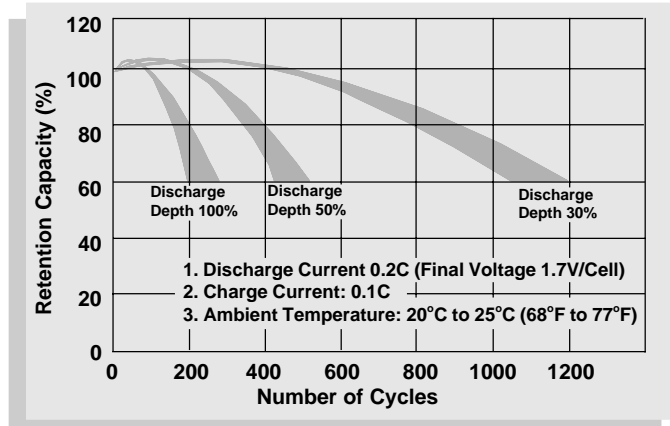

Physical Dimensions: in. (mm)

Terminals: PC (mm)
Positive Negative

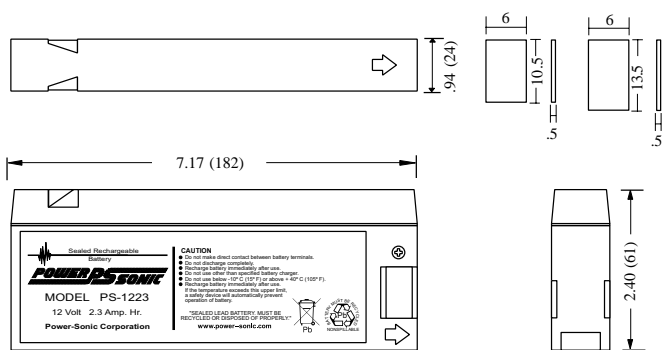

CHARGING

Cycle Applications: Limit initial current to 460mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 23mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.



SALES & MARKETING
3106 Spring Street
Redwood City, CA 94063 USA
Tel: 650-364-5001 Fax: 650-366-3662
national-sales@power-sonic.com



ISO9001-2000
FM39170

www.power-sonic.com

CUSTOMER SERVICE
7550 Panasonic Way
San Diego, CA 92154 USA
Tel: 619-661-2030 Fax: 619-661-3648
customer-service@power-sonic.com